
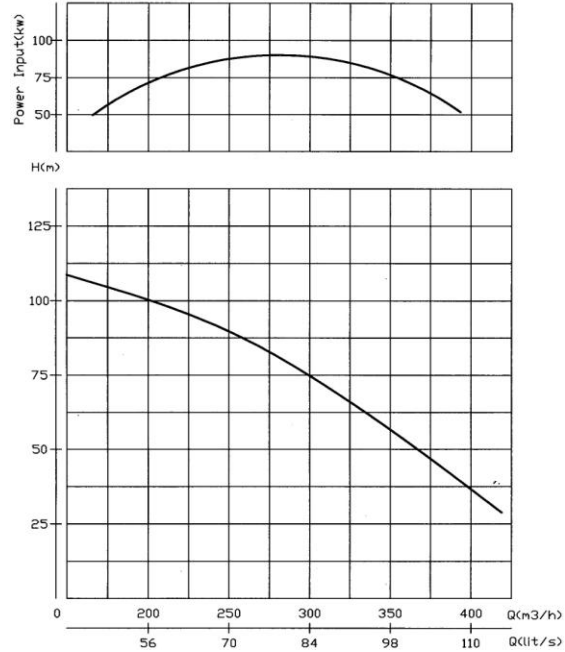


Dewatering Drainage Submersible Electric Pumps

DD 150/6/90 (50HZ)

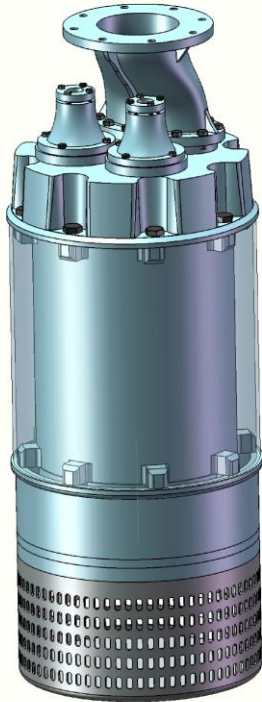

Product	Cable	Rating																				
<p>Centerage dewatering submersible electric pump is ideal for dewatering buildings yard, drainage water in flooded areas, dam construction sites, harbor work, power stations, mines, etc.</p>	Direct on line 2 (4*25)	<p>3~ Rated output 90 kw Speed of rotation 2950 rpm</p>																				
	<p>Monitoring equipment</p> <p>Thermal contacts</p>																					
<p>Denomination</p> <p>Product code DD 150/6/90 Discharge connection 6''-8''</p>	<p>Material</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Outer casing</td><td>Steel</td></tr> <tr><td>Impeller</td><td>Wear resistance steel</td></tr> <tr><td>Wear parts</td><td>Rubber-liner</td></tr> <tr><td>Stator housing</td><td>Cast iron</td></tr> <tr><td>Strainer</td><td>Steel</td></tr> <tr><td>Shaft</td><td>Stainless steel 420</td></tr> <tr><td>O-ring</td><td>Viton Rubber</td></tr> </table>	Outer casing	Steel	Impeller	Wear resistance steel	Wear parts	Rubber-liner	Stator housing	Cast iron	Strainer	Steel	Shaft	Stainless steel 420	O-ring	Viton Rubber	<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>Voltage V</th> <th>Rated current A</th> <th>Starting current A</th> </tr> </thead> <tbody> <tr> <td>380/660</td> <td>180</td> <td>360</td> </tr> </tbody> </table>	Voltage V	Rated current A	Starting current A	380/660	180	360
	Outer casing	Steel																				
Impeller	Wear resistance steel																					
Wear parts	Rubber-liner																					
Stator housing	Cast iron																					
Strainer	Steel																					
Shaft	Stainless steel 420																					
O-ring	Viton Rubber																					
Voltage V	Rated current A	Starting current A																				
380/660	180	360																				
<p>Process data</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Liquid temperature</td><td>Max +40°C</td></tr> <tr><td>Depth of immersion</td><td>Max 20m</td></tr> <tr><td>The PH of the liquid</td><td>PH5-8</td></tr> <tr><td>Liquid density</td><td>Max 1100kg/m</td></tr> </table>	Liquid temperature	Max +40°C	Depth of immersion	Max 20m	The PH of the liquid	PH5-8	Liquid density	Max 1100kg/m	<p>Mechanical face seals</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Upper</td><td>silicon carbide/carbon</td></tr> <tr><td>Lower</td><td>tungsten carbide /silicon carbide</td></tr> </table>	Upper	silicon carbide/carbon	Lower	tungsten carbide /silicon carbide									
Liquid temperature	Max +40°C																					
Depth of immersion	Max 20m																					
The PH of the liquid	PH5-8																					
Liquid density	Max 1100kg/m																					
Upper	silicon carbide/carbon																					
Lower	tungsten carbide /silicon carbide																					
<p>Motor data</p> <p>Squirrel cage 3-phase induction motor</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Frequency</td><td>50HZ</td></tr> <tr><td>Insulation class</td><td>H (+180°C)</td></tr> <tr><td>Ingress of protection</td><td>IP68</td></tr> <tr><td>Voltage variation</td><td></td></tr> <tr><td>-continuously running</td><td>Max ±5%</td></tr> <tr><td>-intermittent running</td><td>Max ±10%</td></tr> </table> <p>Voltage imbalance between phases max 2%</p> <p>No. of start/hour max 15</p>	Frequency	50HZ	Insulation class	H (+180°C)	Ingress of protection	IP68	Voltage variation		-continuously running	Max ±5%	-intermittent running	Max ±10%	<p>Weight</p> <p>Total 690 kg</p>									
	Frequency	50HZ																				
Insulation class	H (+180°C)																					
Ingress of protection	IP68																					
Voltage variation																						
-continuously running	Max ±5%																					
-intermittent running	Max ±10%																					
	<p>Options</p> <p>Rubber-lined wear parts Discharge connector with coupling 8'' Various cable size.</p>																					
	<p>Accessories</p> <p>Hose connection and other mechanical accessories. Electrical accessories such as controller, control panels, starter, monitoring relays, cables.</p>																					