
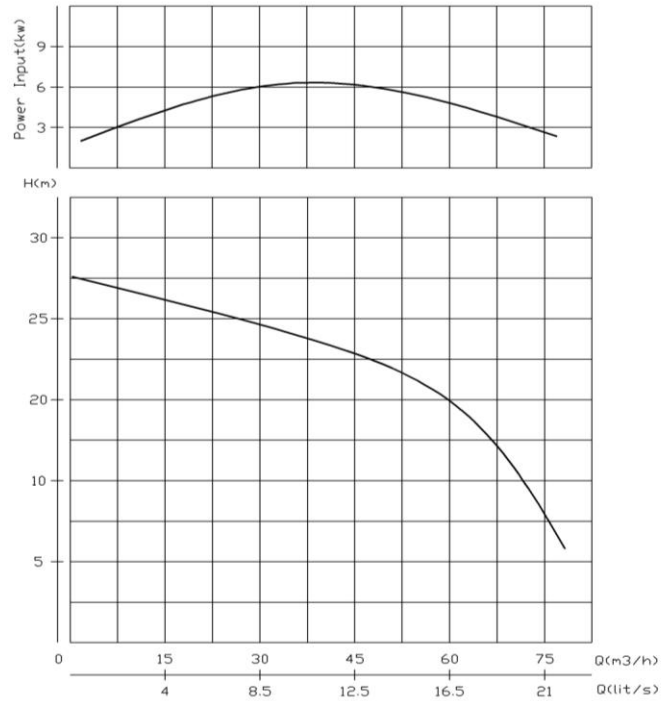


Submersible Electric Pumps SD 170/7.5/100 (50HZ)

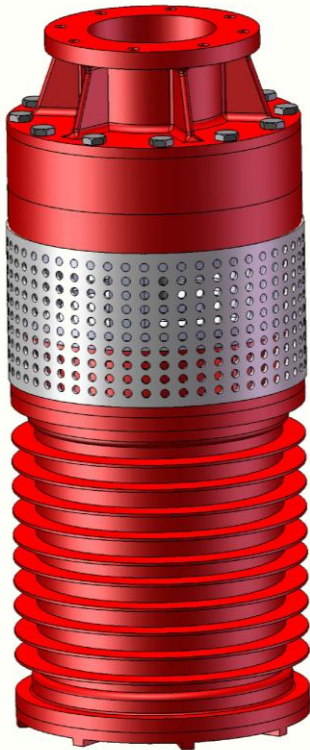

Product	Cable	Rating									
<p>Centerage high performance submersible electric pump is ideal to handle water and other liquid polluted with high concentration of clay, sand, deep excavation where very high head pumping is needed such as open-pit mines, tunnels.</p>	<p>Direct on line 4*4</p>	<p>3~ Rated output 7.5 kw Speed of rotation 2950 rpm</p>									
<p>Denomination</p>	<p>Monitoring equipment Thermal & humidity contacts</p>	<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>Voltage V</th> <th>Rated current A</th> <th>Starting current A</th> </tr> </thead> <tbody> <tr> <td>380</td> <td>15</td> <td>60</td> </tr> </tbody> </table>	Voltage V	Rated current A	Starting current A	380	15	60			
Voltage V	Rated current A		Starting current A								
380	15	60									
<p>Product code SD 170/7.5/100 Discharge connection 4 "</p>	<p>Material</p> <table style="width: 100%; border-collapse: collapse;"> <tr><td>Pump housing</td><td>Cast iron GG25</td></tr> <tr><td>Impeller</td><td>Wear resistance steel</td></tr> <tr><td>Stator housing</td><td>Cast iron GG25</td></tr> <tr><td>Shaft</td><td>Stainless steel 420</td></tr> <tr><td>O-ring</td><td>Viton Rubber</td></tr> </table>	Pump housing	Cast iron GG25	Impeller	Wear resistance steel	Stator housing	Cast iron GG25	Shaft	Stainless steel 420	O-ring	Viton Rubber
Pump housing	Cast iron GG25										
Impeller	Wear resistance steel										
Stator housing	Cast iron GG25										
Shaft	Stainless steel 420										
O-ring	Viton Rubber										
<p>Process data</p>	<p>Mechanical face seals</p> <table style="width: 100%; border-collapse: collapse;"> <tr><td>Upper</td><td>Silicon carbide/carbon</td></tr> <tr><td>Lower</td><td>Tungsten carbide /silicon carbide</td></tr> </table>	Upper	Silicon carbide/carbon	Lower	Tungsten carbide /silicon carbide						
Upper	Silicon carbide/carbon										
Lower	Tungsten carbide /silicon carbide										
<p>Motor data</p>	<p>Options Explosion-proof approved variants</p>										
<p>Squirrel cage 3-phase induction motor Frequency 50HZ Insulation class H (+180°C) Ingress of protection IP68 Voltage variation -continuously running Max ±5% -intermittent running Max ±10% Voltage imbalance between phases max 2% No. of start/hour max 15</p>	<p>Accessories Hose connection and other mechanical accessories. Electrical accessories such as controller, control panels, starter, monitoring relays, cables.</p>										