


Submersible Electric Pumps SD 330/22/150(50HZ)

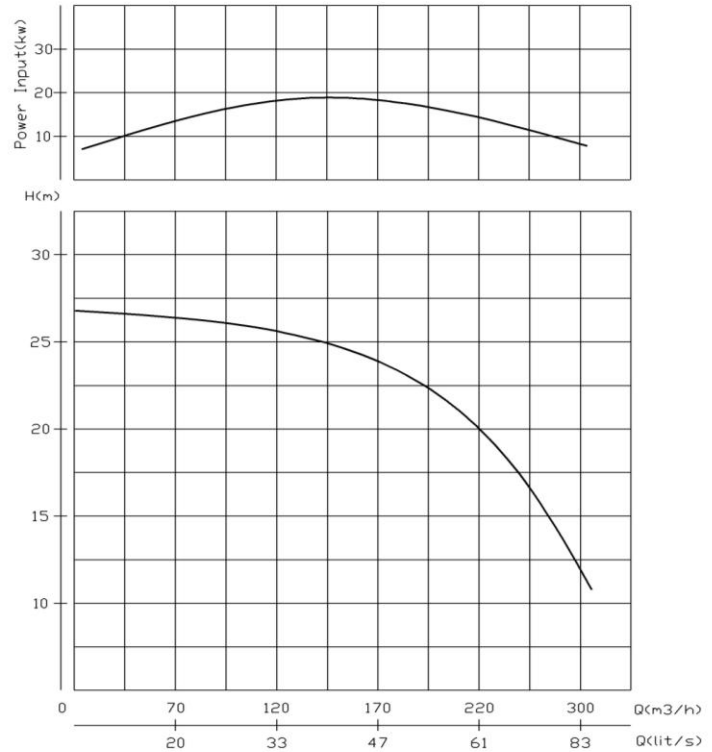

Product	Cable	Rating						
<p>Centerage high performance submersible electric pump is ideal to handle water and other liquid polluted with high concentration of clay, sand, deep excavation where very high head pumping is needed such as open-pit mines, tunnels.</p>	Direct on line 4*10	3~ Rated output 22 kw Speed of rotation 1450 rpm						
	Monitoring equipment Thermal & humidity contacts							
Denomination Product code SD 330/22/150 Discharge connection 6"	Material Pump housing Cast iron GG25 Impeller Wear resistance steel Stator housing Cast iron GG25 Shaft Stainless steel 420 O-ring Viton Rubber	<table border="1"> <thead> <tr> <th>Voltage V</th> <th>Rated current A</th> <th>Starting current A</th> </tr> </thead> <tbody> <tr> <td>380</td> <td>40</td> <td>120</td> </tr> </tbody> </table>	Voltage V	Rated current A	Starting current A	380	40	120
	Voltage V		Rated current A	Starting current A				
380	40	120						
Process data Liquid temperature Max +40°C Depth of immersion Max 20m The PH of the liquid PH5-8	Mechanical face seals Upper Silicon carbide/carbon Lower Tungsten carbide /silicon carbide							
Motor data Squirrel cage 3-phase induction motor Frequency 50HZ Insulation class H (+180°C) Ingress of protection IP68 Voltage variation -continuously running Max ±5% -intermittent running Max ±10% Voltage imbalance between phases max 2% No. of start/hour max 15	Options Explosion-proof approved variants							
	Accessories Hose connection and other mechanical accessories. Electrical accessories such as controller, control panels, starter, monitoring relays, cables.							